
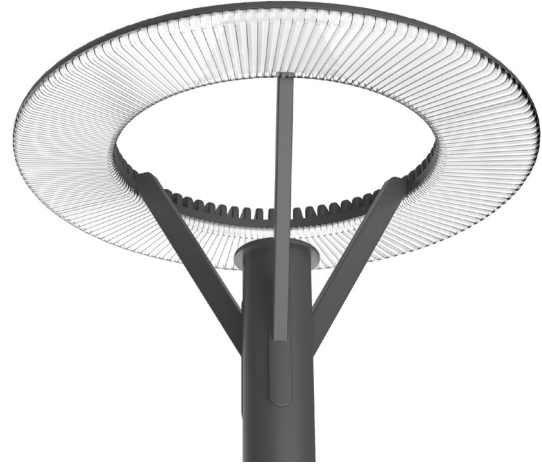


Troya Serisi

Troya Series

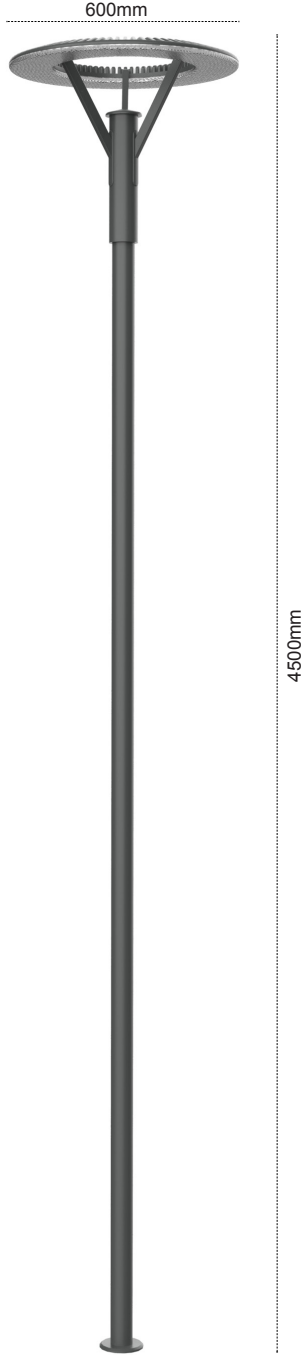

G�vde Body	Al�minyum enjeksiyon Aluminium injection		
LED	SMD Mid power		
Cam Glass	Seffaf prizmatik Transparent prismatic		
S�r�c� Driver	ENEC belgeli ENEC certified		
Giriř Gerilimi Input Voltage (V)	220-240	Frekans Frequency (Hz)	50-60
Renksel ger. ind. Colour Ren. In. (CRI)	>70	IP Koruma IP Protection	IP65
G�c Fakt�r� Power Fac. (cos �)	> 0.95	RAL Kodu RAL Code	7043

Kullanım Alanları

Fields of Application



Bakınız sayfa 232 See page 232

Armat rlere ait b y kl kler Product Details

�r�n Kodu Code No	Tip Type	G�c Power (W)	Iřık Akısı Luminous Flux (lm)	Renk Sıcaklıđı Colour Temp. (K)	Etkinlik Fakt�r� Luminous Effic. (lm/W)	Boyutlar Dimensions (mm) a b	Koli Adedi Pcs/Pack	Koli Ađırlıđı Package Weight (kg)
109742	Troya	60	6600	4000	110	4500x600	1	29,1



EN 60598-2-1